


H  
ec Sheet  
B414BB.pc  
B420BB.pc  
B421BB.pc  
B424BB.pc  
B4300BB.f  
B432.pdf  
B432BB.pc  
B433BB.pc  
B440.pdf  
B441BB.pc  
B450BB.pc  
10:02 AM  
3/20/2015

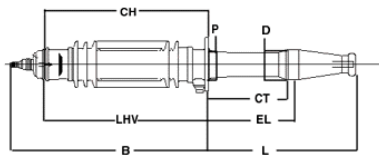

**Original Bushing Information**

**Original Bushing Manufacturer:** G.E.      **Mounting Position:**  
**Catalog Number:** 11B451BB  
**Voltage Class (kV):** 138      **BIL (kV):** 650

Application	DrawLead	Bottom Connected	Oil Circuit Breaker
Current Rating (Amps)		1200	1600
138W1216XK (Amps)		1200	1600

**General Comments:**

**Replacement Information**

**ABB Style Number:** 138W1216XK **Alternate ABB Style Number:**

**Review dimensional differences verifying critical dimensions to meet application requirements.**

**Notes/Comments:**

Catalog Number	BIL	EL	CT	L	B	D	Bolt Circle	No. Of Holes	Hole Dia. (inches)	Creep
11B451BB	650kV	23 in.	23 in.	46.75 in.	65.9 in.	9.75 in.	14.25 in.	6	1.25 slots in.	125.5 in.
138W1216XK	650kV	23 in.	23 in.	46.734 in.	65.626 in.	9.75 in.	14.25 in.	6	1.25 in.	125.5 in.

Catalog Number	Strike	P Dia.	Cable Height/Pin Height for AB Bushing - CH	LHV	Top Terminal Threads (inches)	Bottom Terminal Thread/Configuration
11B451BB	50.89 in.	N/A	56.88 in.	56.88 in.	1.5-12 x 2.0	ansi/IEEE FIG 2
138W1216XK	50.891 in.	9.500 in.	N/A	56.891 in.	1.500-12UN-2A, 2.000 USABLE THD, SP x 12 UN-2A	(4) .375 16UN-2B on 3.75 BC, (8) .500" on 6.75 BC (8) .500 in. 13 UN-2B