


File Spec Sheet  
 H  
 11B450BB.pc  
 11B4518B.pc  
 11B4528B.pc  
 11B4558B.pc  
 11B4618B.pc  
 11B511 w-ou  
 11B5138B.pc

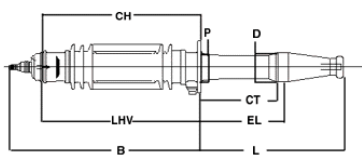

**Original Bushing Information**

Original Bushing Manufacturer: G.E. Mounting Position:  
 Catalog Number: 11B517  
 Voltage Class (kV): 138 BIL (kV): 550

Application	DrawLead	Bottom Connected	Oil Circuit Breaker
Current Rating (Amps)		2000	
138X2000ZC (Amps)		2000	

**General Comments:**

**Replacement Information**

ABB Style Number: [138X2000ZC](#) Alternate ABB Style Number:

**Review dimensional differences verifying critical dimensions to meet application requirements.**

**Notes/Comments:**

Catalog Number	BIL	EL	CT	L	B	D	Bolt Circle	No. Of Holes	Hole Dia. (inches)	Creep
11B517	550kV	23.562 in.	23.562 in.	46.75 in.	44.75 in.	9.75 in.	15.75 in.	8	1.25 in.	28.562 in.
138X2000ZC	550kV	23.562 in.	23.562 in.	46.734 in.	44.788 in.	9.75 in.	15.75 in.	8	1.25 in.	28.601 in.

Catalog Number	Strike	P Dia.	Cable Height/Pin Height for AB Bushing - CH	LHV	Top Terminal Threads (inches)	Bottom Terminal Thread/Configuration
11B517	28.562 in.	12.125 in.	N/A	35.75 in.	2.000-12UN-2A x 2.000 USEABLE THD, SP	IEEE fig 2 & 3
138X2000ZC	28.601 in.	12.125 in.	N/A	35.788 in.	2.000-12UN-2A x 2.000 USEABLE THD, SP x	IEEE fig 2 & 3 N/A

**Cable Adapter:**

NONE

**Flange Adapter:**

NONE