


F H
 xType Spec Sheet
 Bushing
 Bushing 11B693.pdf
 Bushing 11B707.pdf
 Bushing 11B718.pdf
 Bushing 11B722.pdf
 Bushing 11B745.pdf
 Bushing 11B74688.pc
 Bushing 11B74788.pc
 Bushing 11B74888.pc
 Bushing
 Bushing
 Bushing
 Bushing
 Bushing
 Bushing 11B766.pdf
 Bushing 11B767.pdf
 Bushing
 Bushing
 Bushing

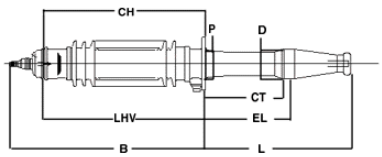

Original Bushing Information

Original Bushing Manufacturer: G.E. Mounting Position:

Catalog Number: 11B767BB

Voltage Class (kV): 345 BIL (kV): 1175

Application	DrawLead	Bottom Connected	Oil Circuit Breaker
Current Rating (Amps)		1600	
362W1600WD (Amps)		1600	

General Comments:

Replacement Information

ABB Style Number: [362W1600WD](#) Alternate ABB Style Number:

Review dimensional differences verifying critical dimensions to meet application requirements.

Notes/Comments:

Catalog Number	BIL	EL	CT	L	B	D	Bolt Circle	No. Of Holes	Hole Dia. (inches)	Creep
11B767BB	1175kV	23 in.	23 in.	62.63 in.	128.12 in.	15.12 in.	21 in.	12	1.250 in.	240 in.
362W1600WD	1175kV	26.25 in.	26.25 in.	62.593 in.	128.172 in.	14.875 in.	21 in.	12	1.25 in.	262.125 in.

Catalog Number	Strike	P Dia.	Cable Height/Pin Height for AB Bushing - CH	LHV	Top Terminal Threads (inches)	Bottom Terminal Thread/Configuration
11B767BB	101.94 in.	16.875 in.	NA in.		107.94 in.	2-12x2.5 ansi/IEEE fig 3
362W1600WD	101.984 in.	16.875 in.	N/A		107.984 in.	2.0-12x2.5 SP x (8) .5-13 holes on 6.75 bc N/A

Cable Adapter:

NONE

Flange Adapter:

NONE